


Tunstall Engineers As Fitted Sign Off	✓
All Wiring Routes (including rise/fall points & Joint Boxes)	
All Equipment Installed/Relocated/Omitted	
(All systems inc Telecare & DECT, all areas inc Apartments)	
Equipment IDs	
(Excluding Fire Alarm if Network Config is Supplied)	
Landlord Fire Alarm Db Levels	
Engineers Name	

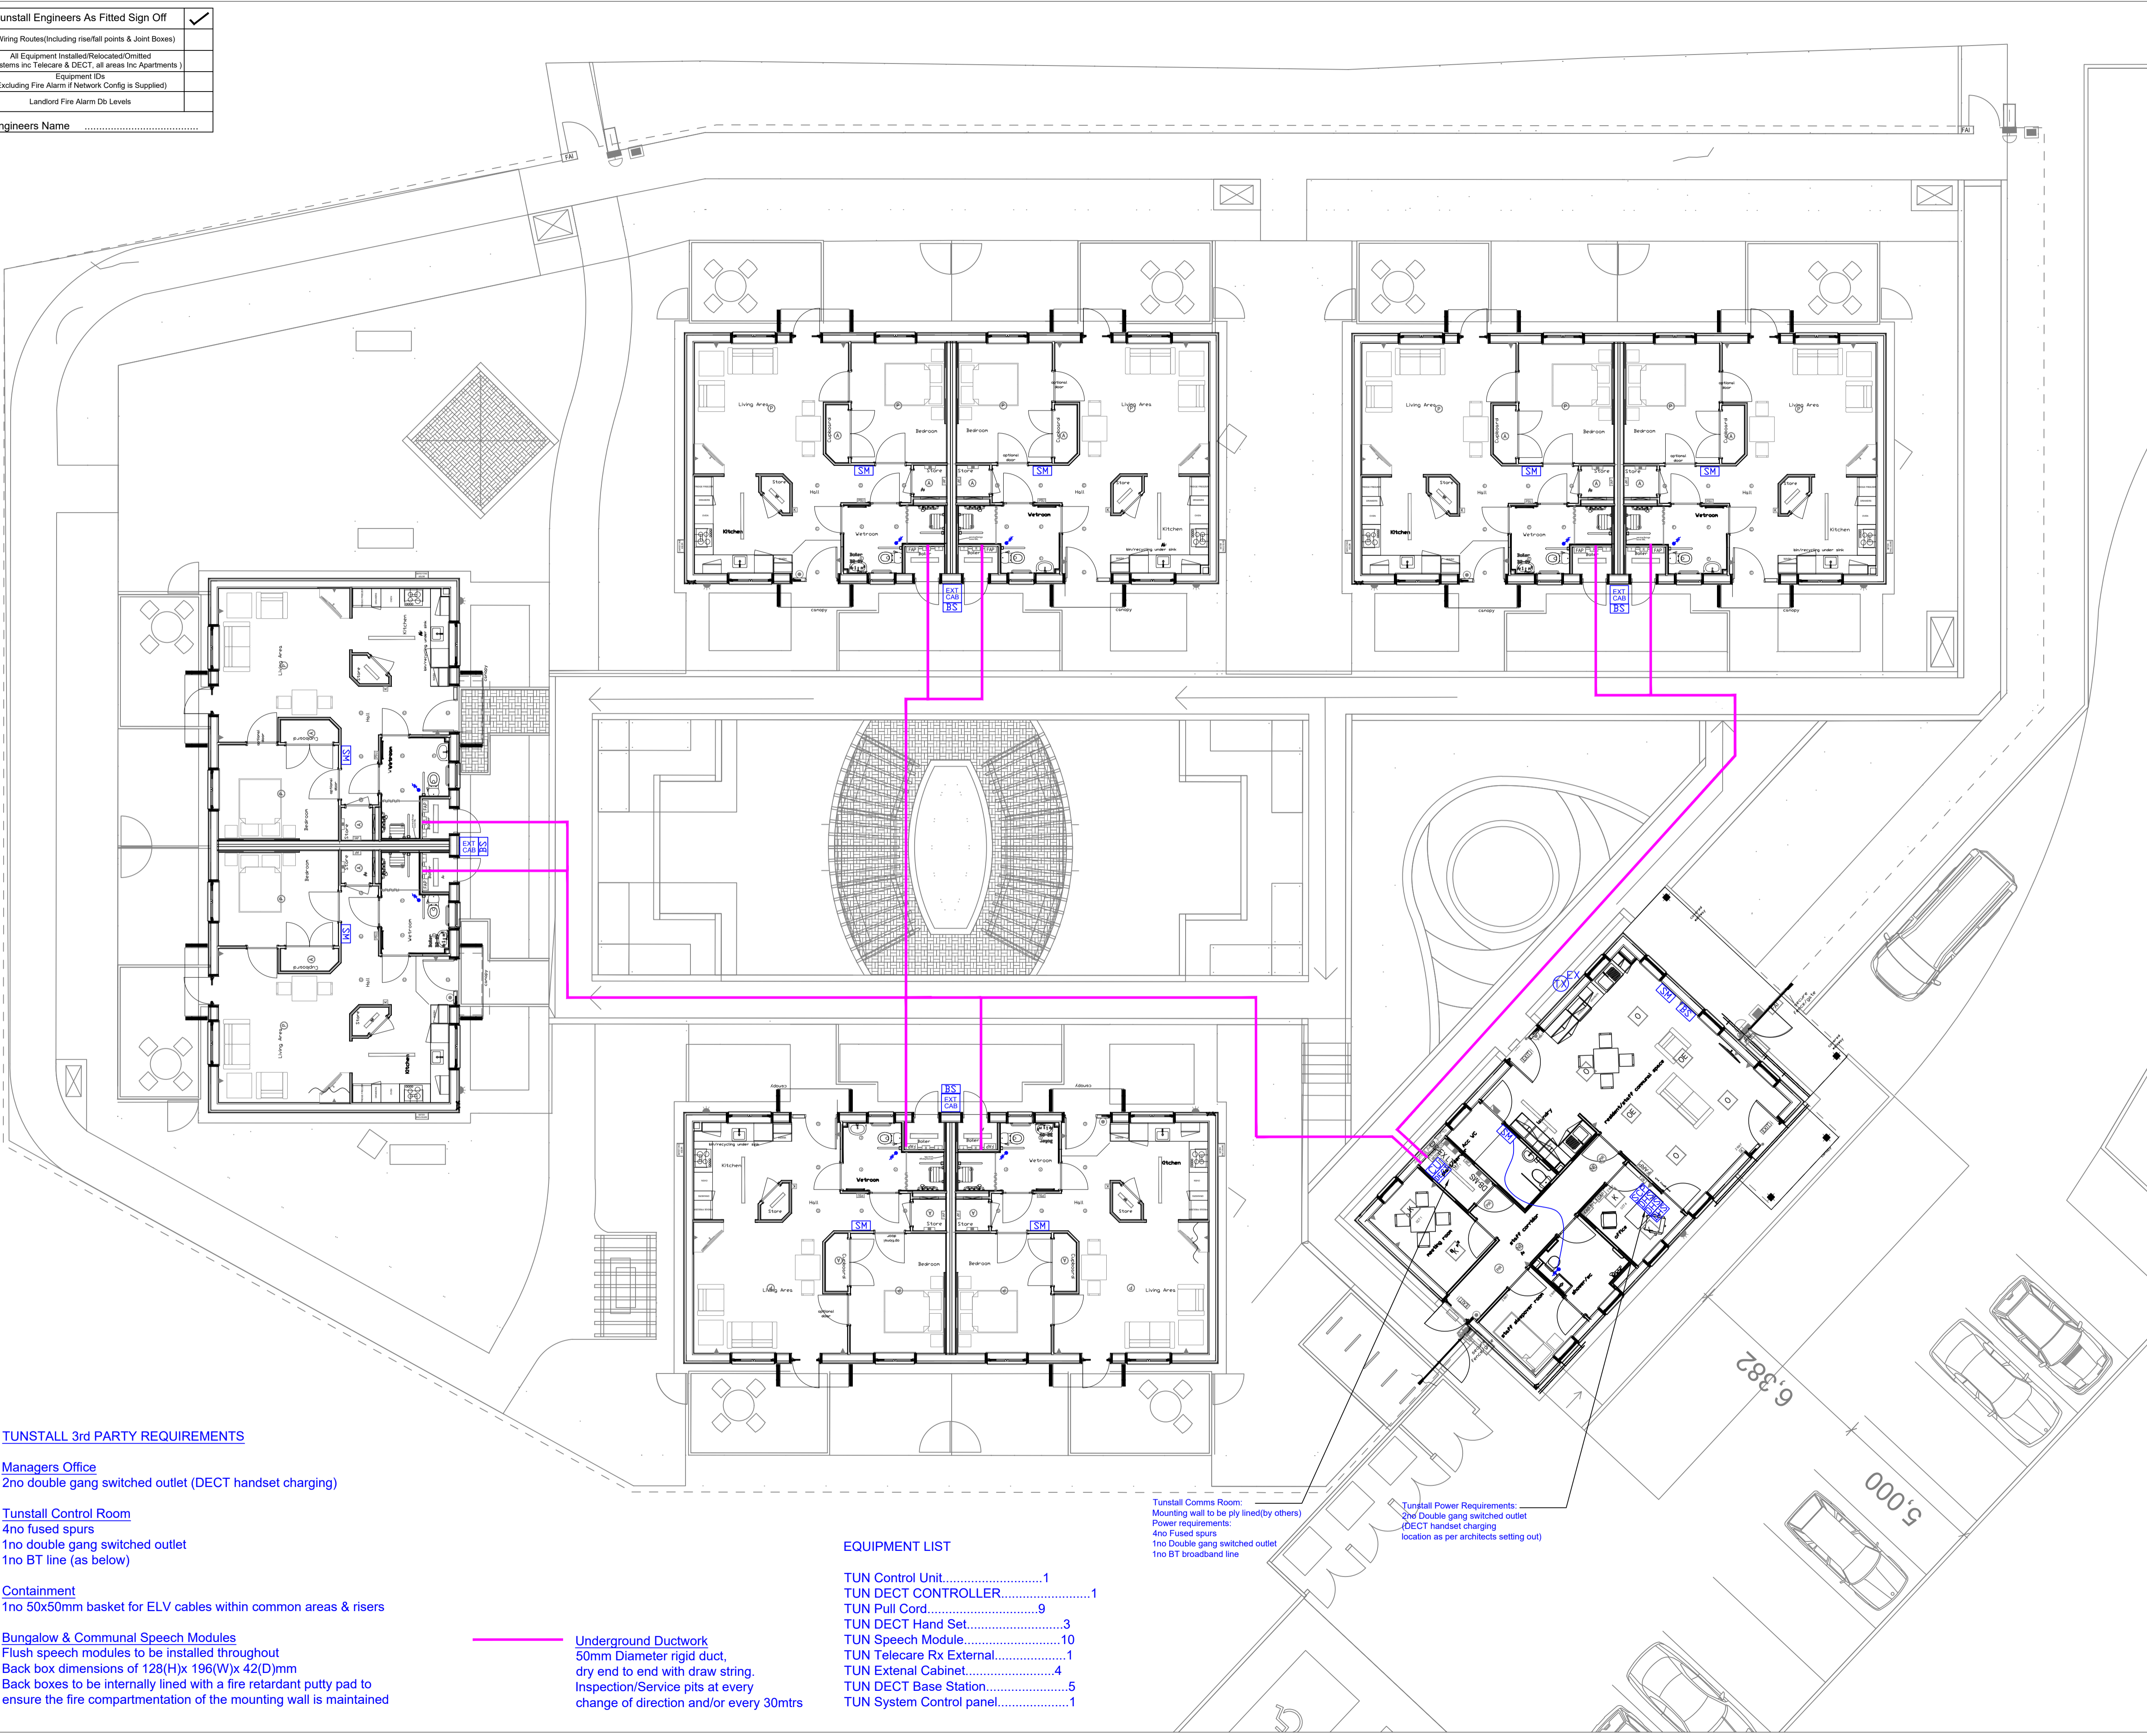

LEGEND

	Control Unit Warden Call
	System Control Panel
	Speech Module
	Warden Call Panel
	Keysafe (Electric Release Type)
	DECT Handset (Staff use)
	DECT Controller
	DECT Base Station
	Telecare Receiver
	Ceiling Pull Switch
	Smoke Detector within Flats
	Heat Detector within Flats
	External Cabinet
	Lock Release Mechanism

For Comment

Rev	Description	Drawn	Check	Date
A	Equipment omitted following DTM 23-07-2020	RR	LM	31-07-2020

Tunstall

Tunstall Healthcare (UK) Ltd
 Whitley Lodge
 Whitley Bridge
 Yorkshire
 DN14 0HR
 Tel: 01977 661234
 WWW.Tunstall.com

Client
Northampton Partnership Homes

Project Title
**Oak Tree Rise
 Billing Brook Road
 Northampton**

Drawing Title
**Communicall Vi Warden Call &
 Door Entry System**

Drawn By	RR	Checked	LM	Date Drawn	17.07.2020
Scale	1:100@A1	Current Revision	A		
Drawing Number	148266-001				

TUNSTALL 3rd PARTY REQUIREMENTS

Managers Office
 2no double gang switched outlet (DECT handset charging)

Tunstall Control Room
 4no fused spurs
 1no double gang switched outlet
 1no BT line (as below)

Containment
 1no 50x50mm basket for ELV cables within common areas & risers

Bungalow & Communal Speech Modules
 Flush speech modules to be installed throughout
 Back box dimensions of 128(H)x 196(W)x 42(D)mm
 Back boxes to be internally lined with a fire retardant putty pad to ensure the fire compartmentation of the mounting wall is maintained

Underground Ductwork
 50mm Diameter rigid duct,
 dry end to end with draw string.
 Inspection/Service pits at every
 change of direction and/or every 30mtrs

EQUIPMENT LIST

TUN Control Unit.....	1
TUN DECT CONTROLLER.....	1
TUN Pull Cord.....	9
TUN DECT Hand Set.....	3
TUN Speech Module.....	10
TUN Telecare Rx External.....	1
TUN External Cabinet.....	4
TUN DECT Base Station.....	5
TUN System Control panel.....	1

Tunstall Comms Room:
 Mounting wall to be ply lined (by others)
 Power requirements:
 4no Fused spurs
 1no Double gang switched outlet
 1no BT broadband line

Tunstall Power Requirements:
 2nd Double gang switched outlet
 (DECT handset charging
 location as per architects setting out)

6,382

5,000